
PROJECT: Pavement Maintenance at Various Sites

OWNER: Clovis Unified School District

ENGINEER: Blair, Church & Flynn

BID NO: 2890

Attention: Jenn Felix

BCF PROJECT NO. 221-0288

Tanairy Barrera

It will be the responsibility of the General Contractor to submit the information contained in this addendum to all its subcontractors and suppliers. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject Bidder to disqualification. The following additions, deletions, and revisions to the Drawings and Project Manual are hereby made and do become a part of these Contract Documents.

TABLE OF CONTENTS

CHANGES TO BIDDING AND CONTRACT REQUIREMENTS

AD3-BR1: Project Duration

CHANGES TO ALL DRAWINGS

AD3-1: Asphalt Pavement Structural Sections

ATTACHMENTS

EXHIBIT A – ASPHALT PAVEMENT SECTION DETAIL

CHANGES TO BIDDING AND CONTRACT REQUIREMENTS


AD3-BR1: Project Duration

1. The project duration has been revised from 40 calendar days to 60 calendar days.

CHANGES TO ALL DRAWINGS

AD3-1: Asphalt Pavement Structural Sections

1. Revise the asphalt pavement structural section detail as shown in the attachment **EXHIBIT A – ASPHALT PAVEMENT SECTION DETAIL**. Assume the following pavement structural sections for the following sites:
 - **Buchanan High School:** 3" AC over 10.5" Class 2 AB over 12" compacted subgrade
 - **Clovis High School Playcourts:** 2" AC over 4" Class 2 AB over 12" compacted subgrade
 - **Clovis High Access Road:** 3" AC over 10.5" Class 2 AB over 12" compacted subgrade
 - **Clovis West High School:** 3" AC over 6" Class 2 AB over 12" compacted subgrade
 - **Community Day School Parking Lot:** 3" AC over 4" Class 2 AB over 12" compacted subgrade
 - **Community Day Playcourt:** 2" AC over 4" Class 2 AB over 12" compacted subgrade
 - **Professional Development Center:** 3" AC over 4" Class 2 AB over 12" compacted subgrade
 - **CART:** 3" AC over 4" Class 2 AB over 12" compacted subgrade
 - **Jefferson Elementary:** 2" AC over 6" Class 2 AB over 12" compacted subgrade
 - **Mickey Cox Elementary:** 2" AC over 6" Class 2 AB over 12" compacted subgrade
 - **Pinedale Elementary:** 3" AC over 4" Class 2 AB over 12" compacted subgrade

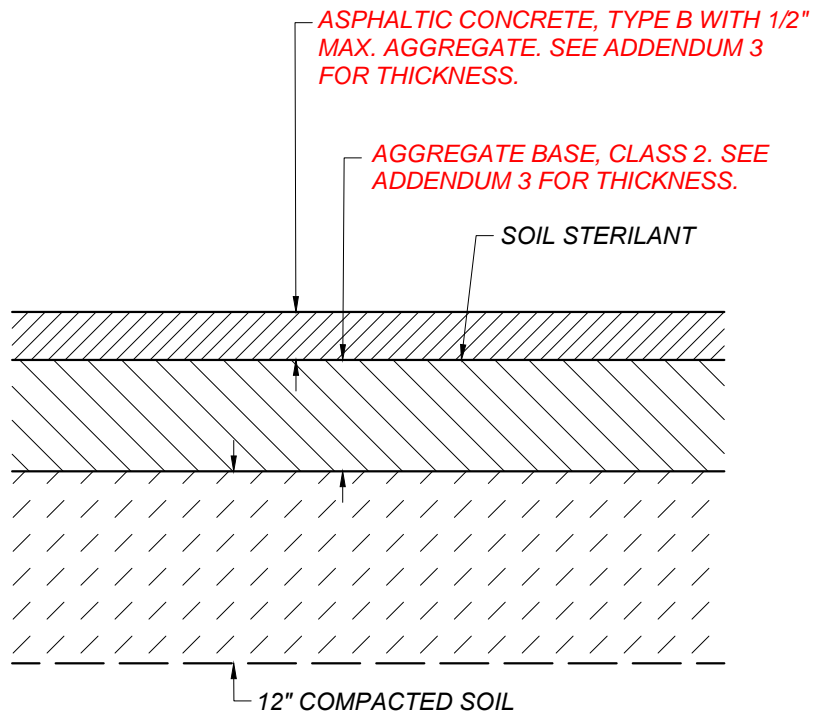

CONSULTANT
 Blair, Church & Flynn
 Consulting Engineers
 451 Clovis Avenue,
 Suite 200
 Clovis, California 93612
 Tel (509) 328-1400
 Fax (509) 328-0900

CLOVIS UNIFIED SCHOOL DISTRICT

2022 PAVEMENT MAINTENANCE
 ADDENDUM 03

DATE: 4/27/22
 ISSUED BY: JF

EXHIBIT A - ASPHALT PAVEMENT SECTION DETAIL